

OFFICE OF THE BOARD OF COUNCILLORS

NABADWIP MUNICIPALITY

PO. - NABADWIP, DIST. - NADIA



BID DOCUMENTS

NAME OF THE WORK

Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No 07 under Nabadwip Municipality, Nabadwip Nadia

NIT NO.:- NM/PWDT/NIT-020e/2022-2023

Tender ID NO.:- 2022_MAD_410538_1

OFFICE OF THE BOARD OF COUNCILORS

NABADWIP MUNICIPALITY

PO. - NABADWIP, DIST. - NADIA

NOTICE INVITING BID

NIT / BID NO :- NM/PWDT/NIT-020e/2022-2023

Dated:- 23/09/2022

The Chairman, on and for behalf of the Board of councillors of Nabadwip Municipality invites sealed competitive Bid on from reliable and resourceful Companies/Firms/Contractors having experience and acumen in construction work as noted below the eligibility as depicted hereunder for participating in the Bid.

- 1) Name of Work :- **Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No 07 under Nabadwip Municipality, Nabadwip Nadia**
- 2) Location of Work: :- Nabadwip Municipal area, P.S: Nabadwip, Dist.: Nadia.
- 3) Name and address of the Engineer in charge :- Nabadwip Municipality
- 4) Eligibility to participate in the Bid :- Enlisted Contractors/ Municipal Enlisted contractor/ bonafide outsiders/ Joint sector organizations/ Consortium having sound financial status

i) **Produce Credentials of a similar nature** of completed work of the minimum value 40% of the estimated amount put to tender under single contract executed within Last 5 (Five) years prior to the Date of issued of tender Notice; or,

ii) **Produce Credentials of 2 (Two) similar nature** of Completed work, each of the minimum value 30% of the estimated amount put to tender under single contract executed within Last 5 (Five) years prior to the Date of issued of tender Notice; or,

iii) Produce Credentials of one Single running work of similar nature which has been completed to the extent of 80% or More and value of which is not less than the disured value at (i) above

AND

Having valid GST/ST, P. Tax clearance Certificates, PAN Card, P.F, Building and other construction workers welfare cess @ 1% will be deducted from each bill. (Reference: FD Memo No. 6895-F. dated. - 11.09.2006.) and Supervisory License (all parts) etc.

- 5) Documents to be produced in support of Credential for Bid:-
- A successful performance and completion certificate supplemented with work order along with payment certificate issued by the competent authority shall have to be furnished in support of credibility in terms with eligibility criteria depicted in this Notice . Besides this, following documents shall have to be furnished:
- Particulars of ownership/partnership or Board of Directors pertaining to the Organization/Company/Firm
 - Copies of valid PAN Card, Sales Tax clearance, P.F & GST clearance Certificate.
 - Corresponding address, & telephone nos. Contract Mobile no. & Email address. of the Organization

All documents in original to be produced in due course of time as & when asked by the Tender Inviting Authority

- 6) Earnest Money(IEMD) 2% of the Quoted Bid price or ₹ 26,601.00
- (Rupees Twenty Six Thousand Six Hundred One Only)***

which is Less as an Initial Earnest Money Deposit shall accompany with Bid Proposal (The remaining part of the Earnest Money shall deposit by the L1 bidder at the time of agreement), in the form of **Submission of EMD may be made in two modes Net banking and RTGS/NEFT (those who want to transfer EMD through RTGS/NEFT must transfer the EMD before three working days from the last date of bid submission)**

Note:- The Earnest Money, as specified in this NIEB shall be paid by online internet bank transfer or NEFT or RTGS (as per GO No. 3975-F(Y) dt. 28.07.2016 of Finance Deptt., Govt. Of West Bengal). Every such Transfer shall be done on or after the date of publish of NIEB. Any Bid without such Transfer of EM (Except exemption as per G.O.) shall be treated as informal and shall be automatically cancelled. Online transfer of Earnest Money receipt (Scanned copy) shall be uploaded as Statutory document.

- 7) Cost price of Bid documents NIL
- 8) Tender Amount: ₹ 13,30,026.00

(Rupees Thirteen Lakh Thirty Thousand Twenty Six Only)


9) Date and Time Schedule :-

<u>Sl No</u>	<u>Particulars</u>	<u>Date and Time</u>
a.	Date of uploading of N.I.T. and Tender Documents online) (Publishing Date)	26-09-2022
b.	Documents download/sell start date (Online)	26/09/2022 at 04.00 PM
c.	Bid submission start date (On line)	26/09/2022 at 05.00 PM
d.	Bid Submission closing (On line)	13/10/2022 at 6.00 PM
e.	Last Date of submission of original copies for the cost of Tender Documents(NIT) and Earnest Money Deposit (Off line)	14/10/2022 at 5.00PM (During office hours)
f.	Bid opening date for Technical Proposals (Online)	17/10/2022 at 10.00 AM
g.	Date and Place for opening of Financial Proposal (Online)	To be notified during uploading of Technical Evaluation Sheet of Tenderers
h.	Date of uploading of list of tenderers along with the offer rates through (on line),	Within 48 (Forty Eight) hours after opening of financial proposal
i.	Also if necessary for further negotiation through offline for final rate.	If required, will be notified within 48 (Forty Eight) hours after uploading the offered rates of tenderers.

10) Time of completion of work:

Time of completion of the Contract is **120 days** from the date of issue of Work Order.

Signature of the Chairman
Nabadwip Municipality

**West Bengal
Tenders****eProcurement System of Government of West Bengal****Tender Details**

Date : 26-Sep-2022 02:33 PM

Print

Basic Details

Organisation Chain	MUNICIPAL AFFAIRS DEPARTMENT URBAN LOCAL BODIES NABADWIP		
Tender Reference Number	NM/PWDT/NIT-020e/2022-2023		
Tender ID	2022_MAD_410538_1		
Tender Type	Open Tender	Form of contract	Percentage
Tender Category	Works	No. of Covers	2
General Technical Evaluation Allowed	No	ItemWise Technical Evaluation Allowed	No
Payment Mode	Online	Is Multi Currency Allowed For BOQ	No
Is Multi Currency Allowed For Fee	No	Allow Two Stage Bidding	No

Payment Instruments

Online Bankers	S.No	Bank Name
	1	ICICI BANK
	2	ICICI NEFT/RTGS

Cover Details, No. Of Covers - 2

Cover No	Cover	Document Type	Description
1	Fee/PreQual /Technical	.pdf	NIT
		.pdf	EMD
		.pdf	AGREEMENT FORM K
2	Finance	.xls	BOQ

Other Important Documents

S.No	Category	Sub Category	Sub Category Description	Format/File
1	CERTIFICATES	Provident Fund Certificate	Provident Fund Certificate	
2	CERTIFICATES	GST Registration Certificate	GST Registration Certificate	
3	CERTIFICATES	Permanent Account Number	Permanent Account Number	
4	COMPANY DETAILS	COMPANY DETAILS 1	PARTNERSHIP DEED, CO-OPERATIVE SOCIETY BYLAW, MOA, TRADE LICENCE, COMPANY REGISTRATION CERTIFICATE	
5	CREDENTIAL	CREDENTIAL 1	CREDENTIAL 1	
6	CREDENTIAL	CREDENTIAL 2	COMPLETION CERTIFICATES	
7	FINANCIAL INFO	P/L AND BALANCE SHEET FOR LAST FINANCIAL YEAR	P/L AND BALANCE SHEET FOR LAST FINANCIAL YEAR	

Tender Fee Details, [Total Fee in ₹ * - 0.00]

Tender Fee in ₹	0.00		
Fee Payable To	Nil	Fee Payable At	Nil
Tender Fee Exemption Allowed	No		

EMD Fee Details

EMD Amount in ₹	26,601	EMD through BG/ST or EMD Exemption Allowed	No
EMD Fee Type	fixed	EMD Percentage	NA
EMD Payable To	Nil	EMD Payable At	Nil

[Click to view modification history](#)**Work / Item(s)**

Title	NM/PWDT/NIT-020e/2022-2023
Work Description	Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No 07 under Nabadwip Municipality, Nabadwip Nadia

Pre Qualification Details	Please refer Tender documents.				
Independent External Monitor/Remarks	NA				
Show Tender Value in Public Domain	Yes				
Tender Value in ₹	13,30,026	Product Category	CIVIL WORKS	Sub category	CONC ROAD WORK
Contract Type	Tender	Bid Validity(Days)	120	Period Of Work(Days)	120
Location	NABADWIP MUNICIPALITY	Pincode	741302	Pre Bid Meeting Place	NA
Pre Bid Meeting Address	NA	Pre Bid Meeting Date	NA	Bid Opening Place	OFFICE OF THE BOARD OF COUNCILLORS
Should Allow NDA Tender	No	Allow Preferential Bidder	No		

Critical Dates

Publish Date	26-Sep-2022 04:00 PM	Bid Opening Date	17-Oct-2022 10:00 AM
Document Download / Sale Start Date	26-Sep-2022 04:05 PM	Document Download / Sale End Date	13-Oct-2022 06:00 PM
Clarification Start Date	NA	Clarification End Date	NA
Bid Submission Start Date	26-Sep-2022 04:10 PM	Bid Submission End Date	13-Oct-2022 06:00 PM

Tender Documents

NIT Document	S.No	Document Name	Description	Document Size (in KB)	
	1	Tendernotice_1.pdf	NIT020	146.75	
Work Item Documents	S.No	Document Type	Document Name	Description	Document Size (in KB)
	1	Additional Documents	K22000.pdf	AGREEMENT FORM K	178.94
	2	Additional Documents	EST20.pdf	ESTIMATE	1549.58
	3	Tender Documents	NIT20E.pdf	NIT	130.31
	4	BOQ	BOQ_808120.xls	BOQ	280.50

Bid Openers List

S.No	Bid Opener Login Id	Bid Opener Name	Certificate Name
1.	chairmannabadwip@gmail.com	BIMAN KRISHNA SAHA	BIMAN KRISHNA SAHA
2.	ssaha@hotmail.com	Surajit Saha	SURAJIT SAHA
3.	pyarimohansarkar12345@gmail.com	PYARI MOHAN SARKAR	PYARI MOHAN SARKAR

Tender Properties

Auto Tendering Process allowed	No	Show Technical bid status	Yes
Show Finance bid status	Yes	Show Bids Details	Yes
BoQ Comparative Chart model	Normal	BoQ Compative chart decimal places	3
BoQ Comparative Chart Rank Type	L	Form Based BoQ	No

Tender Inviting Authority

Name	CHAIRMAN NABADWIP MUNICIPALITY
Address	Office of the Board of Councillors, Nabadwip Municipality, Nabadwip Nadia

Tender Creator Details	
Created By	BIMAN KRISHNA SAHA
Designation	CHAIRMAN
Created Date	26-Sep-2022 02:27 PM

FORM 52

[Vide Rule 148]

Estimate Form


- 1 Nature of Works : Original / repair
- 2 Name of Work : Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No 07 under Nabadwip Municipality, Nabadwip Nadia
- 3 a) Estimate No. : 0036 of 2022-2023
- b) Order No. :
- 4 Name of the Scheme under which the work is proposed to be executed :
- 5 Name of Authority Providing fund :
- 6 Sanction by :
- 7 Date of Sanction :
- Classification of Expenditure (whether Capital or Revenue) :
- 8 Revenue) :
- 9 Sub-total Cost of Work : Rs. 11,15,980.77
- 10 GST @ 18%, as applicable on Sl. No.- 9 : Rs. 2,00,876.54
- 11 Labour welfare cess @1% on Sl. No.- (9+10) : Rs. 13,168.57
- 12 Cost of civil works including labour welfare cess : Rs. 13,30,025.88 (Tender Value)
- 13 Contingency Charge @ 3% on Sl. No.- (9+10). : Rs. 39,505.72
- 14 Total Amount of the Estimate : Rs. 13,69,531.60

Say= (Rupees Thirteen Lakh Sixty Nine Thousand Five Hundred Thirty Two Only)

Say = Rs. 13,69,532.00 only

Specification rule

Rate Based On PWD. (WB), Nadia Schedule of Rate- Volume - I: Building Works (With effect from - 01/11/2017) With Latest CORRIGENDA & ADDENDA.


Sub-Asst. Engineer

Nabadwip Municipality.


Chairman
Nabadwip Municipality.

Chairman
Nabadwip Municipality

Cont.....

Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No.-07 under Nabadwip Municipality.

All Rates are taken from PWD (W.B.), Schedule of Rates effect from 01.11.2017 with latest Corrigenda.

SL. No.	Description of Item(s)	Quantity	Unit	Rate (Rs.)	Per Unit	Amount (Rs.)
1	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including mixed soil but excluding laterite or sandstone) including removing, spreading or stacking the spoils within a lead of 75 m. as directed. The item includes necessary trimming the sides of trenches, levelling, dressing and ramming the bottom, bailing out water as required complete. PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-2, Page No. - 1 (a) Depth of excavation not exceeding 1,500 mm.	69.830	Metre	11927.00	%Metr	8,328.62
2	Brick work with 1st class bricks in cement mortar (1:4) 3rd CORRIGENDA & ADDENDA, Dated: 04.06.2018, Page 1 of 96, PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-7, Page No. - 15 (a) In foundation and plinth	55.120	Metre	5152.17	/Cum	2,83,987.61
3	(A) Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as directed and consolidating the same by thorough saturation with water, ramming complete including the cost of supply of sand. (payment to be made on measurement of finished quantity) 3rd CORRIGENDA & ADDENDA, Dated: 04.06.2018, Page 38 of 96, PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-4(A), Page No. - 2	73.500	Cum	65571.00	%Cum	48,194.69
4	Brick soling with picked jhama bricks including preparation of bed as necessary with brick joints properly filled in and packed with powdered earth and including necessary cushion of similar material below the soling (and in between layers when more than one layer is used) completes as per direction. 3rd CORRIGENDA & ADDENDA, Dated: 04.06.2018, Page 58 of 96, PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-1, Page No. - 226 (a) Single brick flat soling (thickness 75 mm.)	722.750	Sq.M	312.00	Sq.M	2,25,498.00

SL. No.	Description of Item(s)	Quantity	Unit	Rate (Rs.)	Per Unit	Amount (Rs.)
5	Hire and Labour Charges for shuttering with hard wood for precast R.C. Slab curved, or stright and striking out the same including fitting, fixing the precast slab in position with necessary carriage and haulage, hosting etc, complete in all respect. (only the area in contact with concrete to be measured) PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-38, Page No. - 43	134.750	Sq.m	93.00	Sq.m	12,531.75
6	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size) excluding shuttering and reinforcement,if any, in ground floor as per relevant IS codes. 3rd CORRIGENDA & ADDENDA, Dated: 04.06.2018, Page 10 of 96, PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-4, Page No. - 24 a) Pakur Variety	94.020	Cu.M.	5205.65	Cu.M.	4,89,435.21
7	Earth work in filling in foundation trenches or plinth with good earth, in layers not exceeding 150 mm. including watering and ramming etc. layer by layer complete. (Payment to be made on the basis of measurement of finished quantity of work) PWD(WB), S.O.R. Volume - I : Building Works w.e.f. 01/11/2017, Item No.-3, Page No. - 1 (iii) With carried earth arranged by the contractor within a radius exceeding 3 km. but not exceeding 5 km. including the cost of carried earth.	120.310	Cum	39901.00	%Cum	48,004.89

Total - 11,15,980.77

Add GST @18% - 2,00,876.54

Total excluding labour welfare Cess - 13,16,857.31

Add Cess @1% - 13,168.57

Add Contingency @3% on 'Total excluding labour welfare Cess' - 39,505.72

Grand Total - 13,69,531.60

Say, Rs. 13,69,532.00

[Signature]
01/09/22
Sub-Assistant Engineer
Nabadwip Municipality
Nabadwip, Nadia

[Signature] 08/09/2022
Junior Engineer (CIVIL)
Nadia Division
M.E.Dte., M.A.Deptt.
Govt. of West Bengal.


[Signature] #NAME?
09/09/22
Assistant Engineer
Nadia Division
M.E.Dte., M.A.Deptt.
Govt. of West Bengal

[Signature]
12/09/22
Executive Engineer
Nadia Division M. E. Dte.
Deptt. of UD & MA
Govt. Of West Bengal

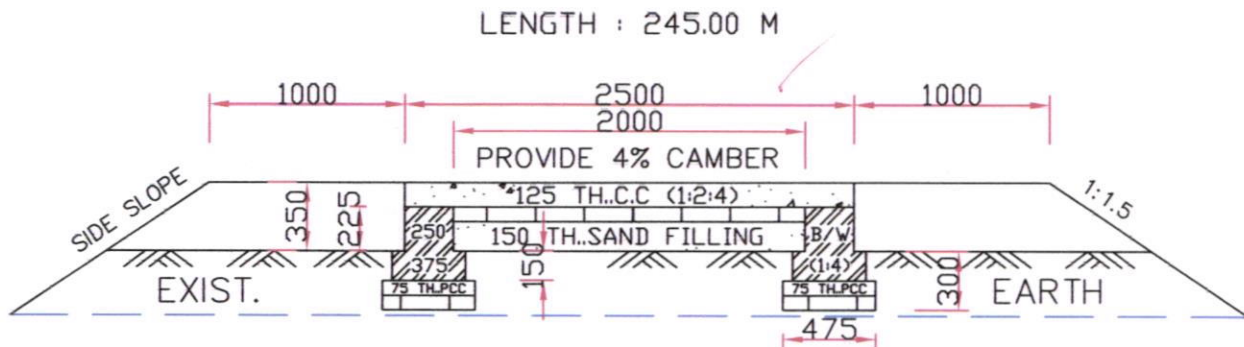
[Signature]
Chairman
Nabadwip Municipality

Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No.-07 under Nabadwip Municipality.

SL. No.	Description of Item(s)	No.	L	B	H	Q	
1	Earth work in excavation of foundation trenches or drains, in all sorts of soil (including (a) Depth of excavation not exceeding 1,500 mm.						
		2	245	0.475	0.3	69.830	Cu.M.
						0.000	Cu.M.
					Total-	69.830	Cu.M.
2	Brick work with 1st class bricks in cement mortar (1:4)						
	(a) In foundation and plinth						
	Side Wall	2	245	0.25	0.225	27.560	Metre
	Side Wall	2	245	0.375	0.15	27.560	Metre
					Total-	55.120	Metre
3	(A) Filling in foundation or plinth by silver sand in layers not exceeding 150 mm as						
		1	245	2	0.15	73.500	Cum
						0.000	Cum
					Total-	73.500	Cum
4	Brick soling with picked jhama bricks including preparation of bed as necessary with brick						
	(a) Single brick flat soling (thickness 75 mm.)						
	Road	1	245	2		490.000	Sq.M
	Below Wall	2	245	0.475		232.750	Sq.M
					Total-	722.750	Sq.M
5	Hire and Labour Charges for shuttering with hard wood for precast R.C. Slab curved, or stright						
	Road	2	245	0.125		61.250	Sq.M
	Below Wall	2	245	0.075	2	73.500	Sq.M
					Total-	134.750	Sq.M
6	Ordinary Cement concrete (mix 1:2:4) with graded stone chips (20 mm nominal size)						
	a) Pakur Variety						
	Road	1	245	2.5	0.125	76.560	Cu.M.
	Below Wall	2	245	0.475	0.075	17.460	Cu.M.
					Total-	94.020	Cu.M.
7	Earth work in filling in foundation trenches or plinth with good earth, in layers not (iii) With carried earth arranged by the contractor within a radius exceeding 3 km. but not						
	No = 2*.92	1.84	245	0.7625	0.35	120.310	Cu.M.
						0.000	Cu.M.
					Total-	120.310	Cu.M.


 Sub-Assistant Engineer
 Nabadwip Municipality
 Nabadwip, Nadia

SCHEME NAME : Construction of Cement Concrete Road from the House of Ram Mohanto up to the House of Ratan Das at Ranir Chara Chaki Para, Ward No.-07 under Nabadwip Municipality.



X-SECTION OF ROAD

01/09/22

PREPARED BY

Sub-Assistant Engineer
Nabadwip Municipality
Nabadwip, Nadia

GSA

SIG. OF CHAIRMAN

Chairman
Nabadwip Municipality